

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 3/06, H04B 7/26		A1	(11) International Publication Number: WO 99/57826
			(43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: PCT/EP99/02995 (22) International Filing Date: 3 May 1999 (03.05.99) (30) Priority Data: 980979 4 May 1998 (04.05.98) FI 9822965.1 20 October 1998 (20.10.98) GB (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): WESBY, Philip [GB/FI]; Nokia Telecommunications OY, Keilalahdentie 4, FIN-02150 Espoo (FI). ESSER, Alex [DE/FI]; Nokia Telecommunications OY, Keilalahdentie 4, FIN-02150 Espoo (FI). (74) Agent: STYLE, Kelda, Camilla, Karen; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: METHOD OF SYNCHRONISATION OF A BASE STATION NETWORK

(57) Abstract

A telecommunications system has a first transmitter unit for transmitting first signals to at least one station; a second transmitter unit for transmitting second signals to at least one station; a receiving unit associated with the first transmitter unit for receiving the second signals; and a synchronisation unit coupled to the receiving unit for generating a control signal to at least one of the first and second transmitters to increase the synchronisation of the first and second signals.

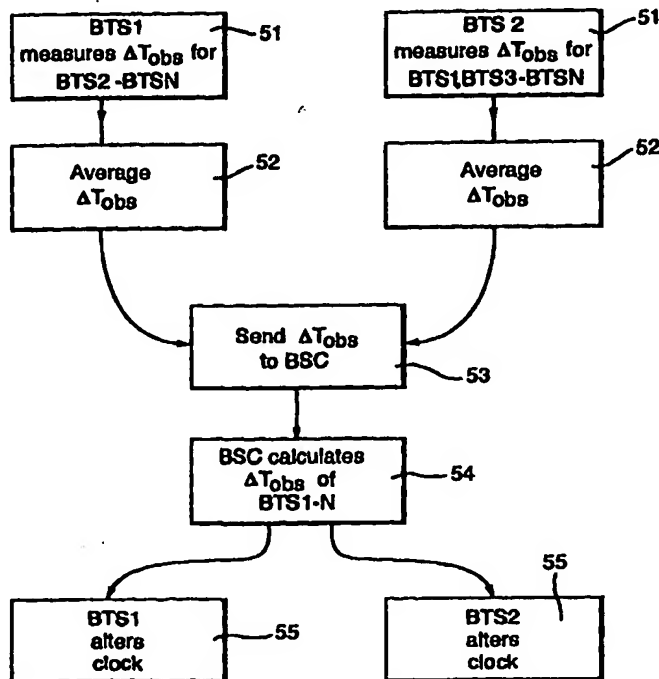

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 99/57826

PCT/EP99/02995

METHOD OF SYNCHRONISATION OF A BASE STATION NETWORK

5

This invention relates to synchronising a network and a method for synchronising a network, to at least some level of accuracy.

10 The network could be a wireless telecommunications network such as a cellular communications network.

Figure 1 shows schematically the configuration of a typical wireless cellular telecommunications network. The network comprises a number of base-stations (BSs) 1, 2, 3 etc. Each base-station has a radio transceiver capable of transmitting radio signals to and receiving radio signals from the area of an associated cell 4, 5, 6. By means of these signals the base-station can communicate with a terminal 9 which may be a mobile station (MS) in the associated cell. That terminal itself includes a radio transceiver. Each base station is connected via a base station controller (BSC) 7 to a mobile switching centre (MSC) 8, which is linked in turn to the public telephone network (PSTN) 10. By means of this system a user of the mobile station 9 can establish a telephone call to the public network 10 via the base station in whose cell the mobile station is located. The location of the terminal 9 could be fixed (for example if it is providing radio communications for a fixed building) or the terminal could be moveable (for example if it is a hand portable transceiver or "mobile phone"). When a mobile station moves from one cell to another it generally switches from communicating with the base station of the first cell to communicating with the base station of the second cell. That process is known as handover or handoff.

35

It has been appreciated by the inventors that if the transmissions of the base stations are accurately synchronised then a number of significant advantages could arise in the operation of the system. For example:

40

There may be no need for a mobile station to spend time and

WO 99/57826

PCT/EP99/02995

2

5 consume power in synchronising to a new base-station during
handover. Thus handovers could be faster and more
efficient.

10 There may be less interference in the system if
transmission bursts from one base-station could be arranged
so that they did not coincide (or coincided only in a
preferred way) with those from neighbouring base-stations.
Thus radio performance and/or network capacity can be
improved.

15 However known networks, especially TDMA (time division multiple
access) networks such as those based on the GSM (Global System
for Mobile Communications) standard, are not synchronised. This
is because it has been difficult to arrange for networks to be
20 synchronised accurately. One way to allow synchronisation would
be to provide every base-station with a very accurate clock.
However, this is expensive. Another route would be to provide
each base station with a separate receiver that can receive a
universal time signal. For example if the location of each base
25 station is known accurately then universal time can be determined
using GPS (Global Positioning System) signals. However, this
also increases cost because of the need to provide each base-
station with a GPS receiver and makes the performance of the
system dependant on the GPS system because if the GPS system
30 fails then accurate synchronisation is lost.

 It is an aim of embodiments of the present invention to provide
at least some synchronisation without having the disadvantages
of the proposals discussed hereinbefore.

35 According to one aspect of the present invention there is
provided a telecommunications system comprising: a first
transmitter unit for transmitting first signals to at least one
station; a second transmitter unit for transmitting second
40 signals to at least one station; a receiving unit associated with
the first transmitter unit for receiving the second signals; and

WO 99/57826

PCT/EP99/02995

3

5 a synchronisation unit coupled to the receiving unit for generating a control signal to at least one of the first and second transmitters to increase the synchronisation of the first and second signals.

10 Thus a system which allows synchronisation to be achieved relatively simply and cheaply may be provided.

Preferably, the receiving unit is arranged to determine the difference between the timing of the first transmitter unit and
15 the second transmitter unit. Preferably, the synchronizing unit is arranged to adjust said difference in timing to take into account the relative positions of said transmitter units.

The receiving unit may be arranged to calculate an average
20 difference between the timing of the first transmitter unit and the second transmitter unit.

Preferably, the receiving unit is arranged to transmit the difference to said synchronisation unit.

25 The first and second transmitter units may be arranged to be synchronised to within 5 μ s. However this will be system dependent.

30 The synchronisation unit may be arranged to synchronise said first and second transmitters to a reference clock. The reference clock may be supplied by said synchronisation unit, a clock signal of one of said first and second transmitter units or the average of clock signals of said first and second transmitter
35 units.

The synchronisation unit may be arranged to generate said control signal if the timing of said first and second transmitters differ by at least a predetermined amount.

40 The second transmitter unit may also have a receiving unit

WO 99/57826

PCT/EP99/02995

4

5 associated therewith for receiving said first signals, said receiving unit also being coupled to said synchronisation unit. This receiver unit may be the same as that associated with the first transmitter unit.

10 The synchronisation unit may be arranged to average the difference in the timing of the first and second transmitter units provided by the receiving units associated with the first and second transmitter units respectively. This may be a weighted average where one timing is given more importance than another,
15 or an average in which both timings are given equal weight.

Preferably, the system comprises a third transmitter unit and a further receiving unit associated therewith, wherein each of the
20 three receiving units determines the difference of the timing signals between the transmitter unit with which the receiving unit is associated and each of the other two transmitter units.

Preferably, said synchronisation unit is arranged to determine
25 the minimum time difference between two transmitter units based on a comparison of the timing difference observed by the receiver unit associated with one of the two transmitter units between said transmitter units and the sum of: the difference observed by the receiver unit associated with said one transmitter unit
30 between said one transmitter unit and the third transmitter unit; and the difference observed by the receiver unit associated with the third transmitter unit between the third transmitter unit and the other of the two transmitter units. It is preferable that all of these timing differences be adjusted to take into account the
35 relative positions of the respective transmitter units.

The or at least one of the receiving units may be incorporated in the transmitter unit with which the receiving unit is associated. Alternatively, the receiver unit may be a separate
40 entity at the respective transmitter unit or removed therefrom.

WO 99/57826

PCT/EP99/02995

5

5 Preferably, the first and second transmitter units use a time
division multiple access method where time is divided into a
plurality of slots and said first and second transmitter units
transmit signals to different stations in different time slots,
said synchronisation unit being arranged to synchronise
10 substantially the beginning of time slots of the first and second
transmitter units.

The frequency of the first and said second transmitter units may
change between time slots. In other words frequency hopping may
15 be used.

n time slots may be arranged in a frame and each frame may have
an associated number. Frames having the same frame numbers of
said first and second signals may be synchronised. Alternatively,
20 the frames having the same frame numbers of said first and second
signals may overlap in time but the beginning of said frames do
not coincide.

A multiplicity of transmitter units may be provided, said
25 multiplicity of transmitter units being divided into a plurality
of groups, each group comprising a plurality of transmitter units
which are substantially synchronised with the other of the
transmitter units in said group and the plurality of groups are
not synchronised with respect to each other.

30 Any suitable number of transmitter units may be provided in each
group. For example, each group may comprises three or four
transmitter units, each transmitter unit serving a single cell.
Alternatively, each group comprises two transmitter units, each
35 transmitter unit serving a plurality of cells.

The system is a wireless cellular telecommunications network or
any other type of wireless system or wired system. The wireless
cellular network may be in accordance with the GSM standard or
40 any other suitable standard. At least one of said transmitter
units may be a base transceiver station or a functionally

WO 99/57826

PCT/EP99/02995

6

5 equivalent unit. Preferably, the synchronisation unit is incorporated in a base station controller or a functionally equivalent unit.

10 According to a second aspect of the present invention there is provided a method for synchronising a telecommunications system comprising: transmitting first signals to at least one mobile station from a first transmitter unit; transmitting second signals to at least one mobile station from a second transmitter unit; receiving the second signals at said first transmitter unit; and comparing the timing of the first signals with the timing of the second signals as received by at the first transmitter unit and generating a control signal to at least one of the first and second transmitter units to increase the synchronisation of the first and second signals.

20 According to a third aspect of the present invention, there is provided a telecommunications system comprising: a first transmitter unit for transmitting first signals to at least one station when said at least one station is in a first area covered by said first transmitter unit; a second transmitter unit for transmitting second signals to at least one station when said at least one station is in a second area covered by said second transmitter unit; and a timing difference determining unit for determining the difference in timing of said first and second transmitter units and for providing information on said difference to at least one station, said information being used by said station when said station moves between said first and second areas.

35 For a better understanding of the present invention and as to how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings, in which:

40 Figure 1 shows schematically the configuration of a typical wireless cellular telecommunications network;
Figure 2 illustrates timing differences between neighbouring

WO 99/57826

PCT/EP99/02995

7

5 base-stations;

Figure 3 illustrates a synchronisation method;

Figure 4 illustrates the situation where there is no direct line of sight between first and third base stations and there is line of sight between first and second and between second and third base stations;

Figure 5 illustrate the situation where there is a line of sight path from a first to a second base station but not from the second to the first base station;

Figure 6 illustrates two groups of base stations where the two groups are not synchronised;

Figure 7 illustrates in more detail the synchronisation method of Figure 3;

Figure 8 illustrates a situation where the frame numbers of two base stations are not synchronised;

Figure 9 illustrates a situation where the frame numbers of two base stations are synchronised;

Figure 10 illustrates a first partial synchronisation system; and Figure 11 illustrates a second partial synchronisation method.

The examples of embodiments of the invention that are described hereinafter relate to implementations in wireless cellular telecommunications systems, such as the GSM system. However, it must be noted that the present invention can be implemented in other networks, for example networks that use fixed links such as cables instead of or in addition to radio communications, or networks of other basic types such as paging or satellite networks. Embodiments of the present invention may be used in conjunction with any other types of suitable access method.

In this description the term "synchronisation" is used to refer to full or partial timing alignment of transmissions. The alignment is conveniently between neighbouring base-stations, which could be: base-stations having neighbouring, overlapping or contiguous areas of coverage; base-stations in a certain area; base stations whose areas of coverage lie wholly or partially in a certain area; or base stations which are under common

WO 99/57826

PCT/EP99/02995

8

5 supervision or control (e.g. by a single base station controller or mobile switching centre). In other types of networks, especially those that do not have defined time slots, synchronisation could be fully or partially to a suitable non-time-slot level.

10

It should be noted that because of propagation delays, a typical network (or a part of it) can generally only be fully synchronised as regards received signals for a given location in the network. It may therefore be more appropriate to consider
15 the synchronisation of signals as transmitted. However, if (for instance in a cellular network) the transmissions of base-stations at the base station sites are synchronous then propagation delay of the radio signals from the base-stations will cause the transmissions from different base-stations to become out of alignment. This is a function of the position of
20 the mobile station and the different propagating paths to each different base-station.

The present exemplary embodiment of a synchronisation method is
25 based on measuring the difference between the timing of one base-station (e.g. from the base-station's internal clock) and the timing of a nearby base-station as determined from reception of those transmissions. This is illustrated in Figure 2. Figure 2 illustrates exaggerated actual and observed relative clock
30 phases as discussed below. Figure 2 illustrates two base-stations 20, 21. Each base-station has a clock that is used for determining when the respective base-station should transmit its signals. Let ΔT_{BTS} be the actual relative phase between the two clocks (also known as Real Time Difference RTD). The specific
35 cause of the non-alignment of the clocks (i.e. the origin of ΔT_{BTS}) is not relevant to the present invention. It should however be noted that ΔT_{BTS} includes the variable phase delays occurring across the transmission equipment between a network reference clock and the respective base-station. Let ΔT_{obs} be the
40 observed relative phase between a received signal from another base-station and the receiving base-station's clock (also known

WO 99/57826

PCT/EP99/02995

9

5 as Observed Time Difference OTD). ΔT_{obs} is larger than ΔT_{BTS} due to propagation delay between the base-stations.

If there is direct line of sight (LOS) then propagation delay ΔT_{LOS} , is equal to the time for a transmitted signal to travel the
10 direct geometric distance between the two base-stations also known as Geometric Time Difference GTD, (GTD = time to travel direct geometric distance). For non line of sight paths, there is an additional propagation delay, defined as ΔT_{NLOS} so that the total propagation delay is $\Delta T_{\text{NLOS}} + \Delta T_{\text{LOS}}$ for a non line of sight
15 path. Thus we have the basic relationship:

$$\Delta T_{\text{obs}} = \Delta T_{\text{BTS}} + \Delta T_{\text{LOS}} + \Delta T_{\text{NLOS}}$$

This is illustrated in Figure 2. Note that ΔT_{obs} and ΔT_{BTS} may be either positive or negative (because the distant clock can be either ahead or behind the receiving clock). In a typical TDMA
20 system such as GSM, ΔT_{obs} and ΔT_{BTS} can be considered to be within plus or minus half a burst period, since phases are only meaningful as partial measures within a single cycle. For example, a relative clock phase of any integral number of burst periods has no consequence. On the other hand, the propagation
25 delays ΔT_{LOS} and ΔT_{NLOS} are always positive. Furthermore, the non-line of sight propagation delay ΔT_{NLOS} between any two base-stations may be non-symmetrical (different in both directions), for example if different antennas and output powers are used in the base-stations.

30

The objective of time slot alignment is to arrange for the phase misalignment ΔT_{BTS} to approach zero for two neighbouring base-stations, and preferably for a group of neighbouring base stations.

35

The accuracy to which synchronisation is required, i.e. how closely ΔT_{BTS} should approach zero, in order to provide benefits in a particular system depends on the design of the system itself. For example, in a GSM system a mobile station is
40 synchronised to its serving base-station to a resolution of at least $\frac{1}{4}$ bit period (i.e. around $0.9\mu\text{s}$). However, benefits can

WO 99/57826

PCT/EP99/02995

10

5 be derived from network synchronisation to a much lower accuracy. According to the GSM specification, for the purpose of limiting the rate of up-ramping and down-ramping of power for each burst transmission, transmit power must be at least -6dB relative to the nominal transmit power within the first and last $7\mu\text{s}$ of each
10 time slot. Furthermore, $5\mu\text{s}$ is the meaningful time resolution derived from the GSM 200 kHz bandwidth. From an alternate perspective, the timing advance of the mobile station downlink transmissions is defined only to a resolution of 1 bit period (i.e. around $3.7\mu\text{s}$). If one considers micro cells and indoor
15 systems, timing advance on this scale is of no consequence since $3.7\mu\text{s}$ corresponds to about 1 km. These considerations suggest that a beneficial target accuracy for time slot alignment in a GSM system could be $5\mu\text{s}$ or better.

20 Once a system is aligned to a time slot level, time slot numbering (frame numbers) may also be synchronised so that all synchronised base-stations simultaneously transmit bursts with the same frame number. This will be described in more detail hereinafter.

25 Figure 3 illustrates a synchronisation method embodying the present invention. The method is based upon each base-station measuring the observed relative clock phases of its contiguous neighbour base-stations. This could be done using a receiver
30 such as a conventional mobile station located at and linked to a respective base station or using a more dedicated receiver at each base-station. The dedicated receiver may be integrated into the base transceiver station. The base station controller processes these time offsets and with knowledge of geographic
35 location of each base-station (or at least the ones from which it can receive signals) estimates the actual relative clock phases ΔT_{BTS} of those base stations. With this information from the base station controller, each base station can alter its own clock to reduce the error due to non-line of sight propagation
40 delays. To achieve this the base-station delays its transmissions according to a clock phase correction calculated

WO 99/57826

PCT/EP99/02995

11

5 by the base station controller.

10 This method will now be described in more detail with respect to Figure 7. In order to achieve full network synchronisation in this way it is necessary for each base-station either to be able to receive signals from at least one other base-station or to be capable of having its own signals received by at least one other base-station. If this is not possible then the operational area of the base station controller can be divided into several synchronised sub-areas.

15 The first stage is to pre-programme the base station controller with the base-stations' geographic locations. This pre-programming need only take place once. Distances between base-stations calculated from these locations should suitably be accurate to at least around 100m; this corresponds to an accuracy of $0.33\mu\text{s}$ for the line of sight propagation delay ΔT_{LOS} . Currently, the operation and maintenance centre OMS of a GSM network does not need to store geographic locations with this accuracy. The base-stations' locations could be determined from
20 network planning data or by other means.

It should be noted that, as will be described in more detail below, knowledge of geographic locations is not essential for base stations which can each receive signals from the other base
30 stations, but it is preferable nevertheless.

The next stage is that each base station must have the capability to receive signals sent from other base stations to mobile stations - that is the capacity to receive in the downlink direction, e.g. on BCCH frequencies for a GSM network. The BCCH (broadcast control channel) is used by the base station to provide mobile stations with the base station identity and information pertaining to the cell. The hardware needed to achieve this may need to be added to the base stations. This
35 measurement hardware will be referred to as a GEMU (Generic Measurement Unit). Some ways in which a GEMU can be provided at

WO 99/57826

PCT/EP99/02995

12

5 a base station are as follows:

1. A separate GEMU which is nearby its host base station but not physically connected to it. This wireless GEMU could use built-in mobile station functionality also to
10 communicate with the network (and specifically its host base station) over a radio link. It could be based on a Wireless Local Loop (WLL) terminal.
2. A separate GEMU which is cable-connected to the host base station.
- 15 3. An internal expansion module for a base station.
4. A modified transmission unit for a base station.
5. A GEMU fully integrated with the base station.

20 Of these, an internal solution would probably be the most cost effective in the long run. The hardware changes required to modify a transmission unit are problematic because the signals received from other base stations do not fall in the transmission unit's own time slots. (Different frequency hopping sequences are not an issue in a GSM system since only BCCH carriers are of
25 interest - in contrast to time of arrival TOA measurements for mobile station location). External options allow for rapid development, optimisation of line of sight conditions (since base station locations are usually not optimised for line of sight), and sufficient distance or shielding from the base station
30 antenna to protect the GEMU from being overloaded by signals from its own base station. An external radio-linked GEMU (option 1) would be relatively compatible with existing base stations without many additional efforts.

35 The base stations must also have the capability to alter their timings for radio transmissions. In most cases this could be done with a software modification to existing base stations.

40 For simplicity in the following descriptions, it will be assumed that the GEMU is integral part of its base station or can be considered as such.

WO 99/57826

PCT/EP99/02995

13

5 In step S1 of Figure 7, each base station BTS 1 and BTS 2 (two
base stations being shown in Figure 7 although the total number
of base stations to be synchronised is N) measures the observed
relative clock phases of the other of the N base stations. For
10 the measurement of observed relative clock phases ΔT_{obs} each base
station pre-synchronises to other base stations (in the same way
as a mobile station does when pre-synchronising to adjacent base
stations by analysing frequency correction and synchronisation
bursts in GSM systems). The base station then measures the time
15 offsets ΔT_{obs} of the received signals relative to its own clock.
(A wireless GEMU could get the clock signal of its host base
station by synchronising also to the host base station over the
radio interface. Its distance from its base station may be up
to about 100m so in pico cell environments one GEMU might even
serve more than one host.)

20 A time resolution of $\frac{1}{4}$ bit period ($\approx 0.9 \mu s$) for ΔT_{obs} and an
accuracy of 10^{-7} should be achievable by any mobile station
following GSM specifications. This would also be sufficient
requirement for the base station; however, a higher resolution
25 is achievable.

The base station controller defines which neighbouring base
stations each base station should monitor. This may be changed
from time to time. In the example shown in Figure 7 each base
30 station monitors the other N-1 members of the group. Received
signals from the base stations can be identified by their BCCH
frequency and BSIC (Base Station Identification Code). The
simplest way for the base station controller to determine which
base stations should be monitored by which others is to use the
35 cell adjacency list; this could even be used by a base station
itself to determine which neighbours to monitor. In a more
sophisticated solution the base station controller could also
select neighbours in a way that is particularly suited for
achieving time slot alignment. If there are more neighbouring
40 base stations than a base station is able to monitor
continuously, then the base station controller might also change

WO 99/57826

PCT/EP99/02995

14

5 these neighbour definitions from time to time.

The base station averages in step S2 the observed time offsets ΔT_{obs} for the or each neighbouring base station over a time period such as a couple of minutes to obtain a stable observed time
 10 offset. The base stations then send in step S3 all these averaged time offsets ΔT_{obs} to the base station controller, preferably reporting with a resolution of at least $1\mu\text{s}$. This resolution is sufficiently higher than the target resolution and is of the order of the minimum resolution of the base station
 15 observed time offset measurements. Observed clock phase measurements will be sent as often as required, suitably as determined by the phase instability of the base station clock, to maintain alignment of transmissions. This may be expected to be in the range from about 15 minutes to a couple of hours for
 20 typical clocks. As an option, the reporting of the clock phase measurements may be done under command from the base station controller.

To calculate actual relative clock phases ΔT_{BTS} the base station
 25 controller in step S4 builds a matrix M of all observed time offsets, corrected by the transmission delay ΔT_{LOS} due to line of sight geographical distance. The elements of this matrix can be written as:

$$M_{1-2} = \Delta T_{\text{obs}} - \Delta T_{\text{LOS}}$$

30 (for the clock phase of base station 2 as observed by base station 1). M_{1-2} remains undefined if base station 1 did not provide a measurement for base station 2, either because it was not told to monitor base station 2 or because it does not "see" base station 2. The line of sight-corrected time offsets M_{1-2}
 35 differ from the actual clock phases ΔT_{BTS} by non-LOS propagation delays ΔT_{NLOS} , since $M_{1-2} = \Delta T_{\text{BTS}} + \Delta T_{\text{NLOS}}$, according to the basic equation:

$$\Delta T_{\text{obs}} = \Delta T_{\text{BTS}} + \Delta T_{\text{LOS}} + \Delta T_{\text{NLOS}}.$$

40 Fortunately, these errors can be reduced because there is redundancy in the matrix M. This redundancy is due to the fact that there are different "paths" along which base stations can

WO 99/57826

PCT/EP99/02995

15

5 "see" each other. For example, base station 1 might "see" base station 3 directly, but might also "see" base station 2, which in turn "sees" base station 3, as illustrated in Figure 4.

10 If there is line of sight, then the time offsets simply add up, for example:

$$M_{1-3} = M_{1-2} + M_{2-3}.$$

15 Since the loss of line of sight can only increase these time offsets (because as described above $\Delta T_{NLOS} > 0$), the time offset $M_{1-2} + M_{2-3}$ is a better estimate for the true clock offset between base station 1 and 3 if it is smaller than M_{1-3} . This happens, for example, if there is line of sight between base station 1 and base station 2 and between base station 2 and 3, but no line of sight between base station 1 and 3 (see Figure 4).

20 In general, the principle is to find the minima of different time offsets measured along different paths between two given base stations. For every triplet of base stations where base station 1 "sees" base station 2 and base station 2 "sees" base station 3, M_{1-3} is substituted by $M_{1-2} + M_{2-3}$ if either M_{1-3} is undefined or
25 if $M_{1-2} + M_{2-3} < M_{1-3}$. After all such triplets are processed in this way, the minimisation is repeated all over again until the whole matrix M converges (does not change any more with a pass of the minimisation process). The time offsets produced cannot be worse than the original ones.

30 Asymmetrical non line of sight errors are not dealt with in the aforementioned minimisation procedure. These could occur, for example, if base station 2 "sees" base station 1 with line of sight but the reverse is not true (see Figure 5). The symmetry
35 $M_{1-2} = -M_{2-1}$ holds for line of sight. Non-equality due to lack of line of sight can be averaged out. For every pair of base stations where M_{1-2} and M_{2-1} are both defined, the real clock phase ΔT_{BTS} for base station 2 relative to base station 1 is estimated as $(M_{1-2} - M_{2-1})/2$. This is an average with an absolute error of no
40 more than $(M_{2-1} + M_{1-2})/2$ which can be used to assess the accuracy of the synchronisation process. If only one of the time offsets

WO 99/57826

PCT/EP99/02995

16

5 M_{1-2} , and M_{2-1} is defined, it is used as an estimate of the actual relative clock phase ΔT_{BTS} .

Additional error estimates may be obtained by analysing the statistical properties of the observed relative clock phases as
10 they are repeatedly reported over time.

The actual relative clock phases ΔT_{BTS} determined in this way can be expected to meet the proposed accuracy requirement of $5\mu s$, since the loss of accuracy due to the reduced non-line of sight error should normally be less than a factor of 5. In general,
15 accuracy increases with the number of measured observed relative clock phases.

The algorithms specified above for reducing errors due to non-line of sight may be further be optimised for efficiency. For
20 example, the computation time requirements of the given minimisation algorithm is of the order N^3 , with N being the number of base stations operated by the base station controller, because data from two paths involving three base stations must
25 be processed. The relationship between N and time depends on computer parameters. N^3 means that for example twice as many BSs would require $8 \times$ more computer power (i.e. $2^3=8$). An advantage of the method described above is that it is not time-critical and thus the base station controller can selectively synchronise base
30 stations as required. A general preferred feature of the base station controller processing algorithm is that it makes all estimated relative clock phases "compatible", so that a determined relative clock phase ultimately does not depend on the "path" between the base stations along which it is determined.

35 In a synchronised network it becomes relatively easy to determine the location of a mobile station. For determining the location of a mobile station a new network element (referred to herein as an MLC (Mobile Location Centre)) could perform the actual
40 calculation of a mobile station's location. At least for observed time difference based mobile station location both the

WO 99/57826

PCT/EP99/02995

17

5 base station controller and the mobile location centre MLC would preferably process the observed relative clock phases ΔT_{obs} . In one embodiment the base station controller could receive these measurements from the GEMU and pass them on to the mobile location centre, and the base station controller and the mobile location centre could process them independently. In another option the GEMU could communicate only with the mobile location centre, and the mobile location centre could pass the calculated real time differences to the base station controller. In this case, all the processing described above happens in the mobile location centre and wireless GEMUs would be favoured.

As proposed above, time slot alignment is possible if there is at least one-way "visibility" for each base station. This situation might not apply for all base stations operated by a base station controller. In this case, the base stations could be synchronised to form groups of mutually synchronised base stations, none of the base stations in one group receiving or being received by any of the base stations in another group. This situation is illustrated in Figure 6, where base stations 40, 41 and 42 form one group 43 and base stations 44 and 45 form another group 46. Each of the base station groups can be synchronised independently, which leads to synchronised sub-areas of the area controlled by a base station controller. The grouping can be determined from the processed matrix M. The base station controller may also decide to artificially create more synchronised sub-areas if it considers certain relative clock phases ΔT_{BTS} to be too inaccurate to be used for synchronisation.

Optionally, the system could also be used to check for faults in the system. For example, if the base station controller finds that a base station from which signals have previously been received by another base station suddenly is no longer received by the latter base station (or especially is no longer received by a number of other base stations) or if its timing wanders excessively then the base station controller could generate an alarm to indicate to the network operator that there is a

WO 99/57826

PCT/EP99/02995

18

5 potential fault.

After all the relative clock phases have been estimated, the base station controller must choose an (absolute) reference clock phase to which all base station clocks will be synchronised (for
10 each synchronised sub-area). (Note that the following choices refer to the phase alignment of transmissions and not to the rate of the base station clocks). One possibility is for the base station controller's own clock to be chosen to provide a reference; in this case its phase should preferably be relatively
15 stable. If the base station clock rates in a system are already derived from the base station controller clock rate over a standard interface, then this choice would have the benefit of requiring only relatively small phase corrections since the phase misalignment ΔT_{BTS} would primarily be caused by variable phase delays in the transmission equipment. Alternatively, one of the
20 base stations may be selected as the reference. This would preferably be a high-power base station that is "visible" to many other base stations. This has the advantage that many of the determined relative clock phases will probably be quite accurate since ΔT_{BTS} would then depend in many cases mainly upon a single,
25 commonly observed relative clock phase ΔT_{obs} . Alternatively, the base station controller could calculate the average relative clock phase of all base stations. This reference would not correspond to any particular base station but would overall
30 minimise the phase changes necessary to synchronise all clocks. This would only be useful if the base station clock phases were distributed non-uniformly and all base station clock rates were sufficiently accurate. (For equally distributed clock phases, an "average phase" would be arbitrary).

35 The base station controller then calculates a clock phase correction for each base station from the difference between the reference clock phase and the determined relative clock phase for the respective base station. In a system that is already
40 partially synchronised each clock phase correction can suitably be represented by an integer number of steps of the desired

WO 99/57826

PCT/EP99/02995

19

5 synchronisation accuracy or less, in the range from zero to the maximum error in the existing synchronisation scheme. For instance, in GSM the correction could be a value between zero and one burst period ($\approx 577\mu\text{s}$).

10 The base station controller sends the calculated clock phase corrections to each base station, preferably with a resolution of at least $1\mu\text{s}$. To avoid excessive messaging traffic and synchronising operations it preferably only sends a message if the base station exceeds or almost exceeds the permitted
15 synchronisation bracket, i.e. only if the required correction exceeds a certain threshold e.g. $5\mu\text{s}$.

 The base station then corrects its own clock in step S5 by delaying the clock phase by the received specified correction
20 value to a resolution of at least $1\mu\text{s}$. Several hardware and software implementations are possible to achieve this:

1. A delay circuit could be located between the clock circuit and the main processor and this circuit could artificially
25 delay the electrical signal comprising the clock signal, i.e. it shifts the rectangular clock pulse train in time. This could allow highly accurate (and preferably analogue) shifting of the timing.
2. A digital delay circuit could be located between the clock
30 circuit and the main processor which suppresses some clock pulses. Where the base station clock runs at 26MHz this method would yield a resolution of $\approx 0.04\mu\text{s}$ since this is the duration of a clock pulse.
3. A software delay functionality could be provided to modify
35 internal time counters used for controlling the point in time when radio transmissions begin. This could also give sufficiently high resolution. This may be the easiest way to modify an existing base station to provide the necessary functionality.

40

 The application of the delay must not violate the base station's

WO 99/57826

PCT/EP99/02995

20

5 timing requirements on the radio interface, therefore, the base
station may spread a large phase correction over some time, e.g.
1s, and phase changes should preferably be made between two time
slots. The largest corrections should normally occur shortly
10 after the base station has started up, when they do not matter
too much. After phase synchronisation has been established,
corrections should rarely exceed 5 μ s by much.

Optionally, the base station might modify the speed of its clock
if the last few received clock phase corrections indicate a
15 systematic deviation. This would improve the overall accuracy
of synchronisation, and would in general allow for a much
cheaper, less accurate base station clock to be implemented.
However, the ability to "see" another base station would then be
more important.

20 The full synchronisation of base station clocks is not
necessarily needed in order for more efficient handovers to take
place. With what may be termed pseudo-synchronised handovers,
the network would tell the mobile station the relative clock
25 phase between the current and the new base station, determined
as described above. For handover purposes, this would provide
generally the same benefits as truly phase-synchronised base
station clocks. However, mobile station support for pseudo-
synchronised handovers is only optional from GSM phase 2 onwards,
30 whereas synchronised handovers are a standard GSM feature.

It is possible to synchronise base stations over a larger area
than that under the influence of a single base station
controller. Some base stations at a base station controller
35 boundary will be able to receive signals from base stations
operated by another base station controller, and thus base
station controllers may gain knowledge of clock phase differences
relative to synchronised areas controlled by other base station
controllers.

40 In some circumstances synchronisation may become increasingly

WO 99/57826

PCT/EP99/02995

21

5 difficult the larger the synchronised area is. In addition to
the increased signalling that is needed to achieve
synchronisation over a larger area, the time taken to reach a
synchronised steady state in a larger area would be expected to
10 be larger. In addition, time slot alignment may itself become
less advantageous as the size of the synchronised area increases.
Therefore, it may be desired to restrict the size of synchronised
areas to an optimum intermediate size. A natural candidate to
approximate this size is a base station controller area.
However, sometimes a contiguous geographical area may be covered
15 by two (or more) interleaving base station controller domains,
which reduces "visibility" between base stations under the same
base station controller but increases mutual "visibility" of
those interleaving base station controller domains. Furthermore,
the capacity of a base station controller may be limited to (for
20 instance to 256 or 512 transmitters). If the domain of the base
station controller were synchronised, this number of transmitters
could equate to fewer base stations than in current
implementations because with synchronisation more transmitters
could be deployed at each base station to take advantage of the
25 increase in capacity that might be made possible by
synchronisation. The potential advantages of tight reuse
patterns and observed time difference based methods of mobile
station location are emphasised if time slots are aligned within
the whole network.

30 One way to achieve inter-base station controller synchronisation
is to employ extra signalling between base station controllers
to exchange observed, inter-base station controller, relative
clock phases. This could be done, for example, by direct
35 signalling between the base station controllers or, since base
station controllers do not generally communicate directly, via
another unit such as a mobile switching centre or a mobile
location centre. In the latter case one possibility would then
be for the mobile switching centre or a mobile location centre
40 to command clock phase changes for all its base station
controllers and/or the base stations and/or transmitters under

WO 99/57826

PCT/EP99/02995

22

5 its control. Clock phase corrections could be uniformly applied
to all base stations under one base station controller. In the
special case of interleaving base station controller domains, no
inter-base station controller signalling may be needed. Each
base station controller could iteratively change the clock phases
10 of its base stations by half the observed relative clock phase
to the other base station controller's base stations to achieve
mutual synchronisation. Another solution is to establish a
synchronisation hierarchy among base station controllers. Each
base station controller could then synchronise all base stations
15 in its base station controller domain with one particular
adjacent base station controller domain, with one base station
controller domain therefore being the synchronisation reference
for the whole network. Another solution is for the calculation
of both the actual relative clock phases and the clock phase
20 corrections to be done not by the base station controller, but
by a centralised network element, such as the mobile location
centre (especially if a mobile station location function is
implemented). The base station controller could then only be
responsible for sending clock phase corrections to the base
25 stations.

Some level of fault tolerance may be provided. If some error
were to cause a base station to lose synchronisation with the
rest of the network then quality of service need only degrade for
30 a short period in time. Once the respective base station
controller noticed the loss of synchronisation it could treat the
faulty base station as non-synchronised until the problem is
fixed. Loss of synchronisation would disturb the network only
locally, it being unlikely that several base stations in the same
35 area lose synchronisation at the same time. To reduce
degradation in quality of service during the time needed to fix
the fault, the base station controller might deactivate the
traffic-only transmitters of the base station until
synchronisation is regained, since the tight reuse factor of a
40 synchronised GSM-type network would not apply to the BCCH
transmitters.

WO 99/57826

PCT/EP99/02995

23

5 The implementation of the system described above in a pre-existing network may be done in phases. A first phase could use a wireless GEMU. Some of the aspects of the processing that might be implemented in software in a base station controller, such as the handling of non-line of sight effects and inter-base
10 station controller synchronisation, could be omitted. In another implementation phase measurement hardware could be fully integrated with base stations (e.g. newly installed base stations) and/or more extensive software processing could be provided. To provide for synergy with mobile station location
15 services software for determining real time differences could be implemented in a dedicated mobile location centre instead of at base station controllers.

It is clearly preferable that all base station clocks in a common
20 synchronisation domain should running at the same rate, and preferably (in a GSM system) to the specified GSM accuracy.

Some potential advantages of certain implementations of the system described above will now be described with specific
25 reference to GSM networks. However, it will be understood that some or all of the advantages are also applicable to other networks.

A synchronised network provides the potential for faster
30 handovers, with performance generally the same as conventional intra-cell handovers. In a GSM implementation, for example, the time for handover signalling might be reduced from roughly 200ms to around 100 ms.

35 In a conventional GSM system frames can be lost during handovers, causing audible clicks. This could be reduced by the implementation of synchronised handovers.

Mobile stations leaving low power coverage areas such as in
40 buildings may enter a much a higher power environment. Faster handovers mean that there may be reduced interference from the

WO 99/57826

PCT/EP99/02995

24

5 mobile to the higher power environment and there is less risk
that a call will be dropped.

Faster handovers mean that indoor pico cell handovers are
possible as are handovers where the user is travelling in a lift
10 between pico cells on different floors.

Faster handovers mean that less overlap is needed between cells
to permit handovers of fast moving mobile stations, such as ones
in trains.

15 In a conventional GSM network the current and the new base
station both reserve capacity for the duration of the handover.
The ability to make faster handovers means that the duration of
this simultaneous reservation may be reduced and capacity thereby
20 increased.

Synchronised handovers may need less signalling than
unsynchronised handovers.

25 Synchronisation of base stations may make higher levels of
frequency reuse possible. Theoretically, in a GSM system it
might be expected that for high capacity cells traffic-only
frequencies could move from a reuse factor of 6 to a reuse factor
of 1, although in practice a reduction in reuse factor from 7-8
30 to 2-3 is perhaps more realistic. This advantage arises because
by causing the base stations to transmit in phase, there may be
significantly less interference. A higher level of frequency
reuse should permit more capacity, since additional transmitters
could operate without the need for more frequencies to be
35 allocated. Furthermore, simpler reuse patterns would simplify
network planning. Current frequency planning is often performed
by allocating frequencies on a transmitter basis. In a
synchronised network channels could be dynamically allocated on
a per-slot basis, allowing 8 times the granularity in a GSM
40 system. This would require knowledge of relative offsets of TDMA
time slot numbers between base stations, but no synchronisation

WO 99/57826

PCT/EP99/02995

25

5 of frame numbers. A base station controller could apply
frequency hopping as required. With frequency hopping, there
would be expected to be little interference between two channels
using the same set of frequencies and the same hopping sequence
number but different mobile allocation indices. Synchronisation
10 could thus potentially allow the same set of hopping frequencies
to be used at adjacent base stations without interference if
hopping sequences were synchronised. Full frame number
synchronisation could enable synchronisation of hopping
sequences.

15 Erlang tables are used to predict capacity according to the
number of traffic channels per cell. With faster handovers
traffic could be dynamically shifted to neighbouring cells to
increase capacity by dynamically exploiting diversity between
20 overlapping cells of the network.

Rural base stations may drop calls in the region of overlap
between cells due to low signal strength. With synchronisation,
the base station controller could be programmed to transmit the
25 same information from the two base stations in question with the
same frequency and the same time slot. The mobile station may
therefore receive the same signal from two base stations and this
will increase the effective strength of signals in the region of
overlap.

30 In many instances IUO "Intelligent Underlay Overlay" is currently
based on worst case assumptions of interference, and capacity is
planned on a per-transmitter basis. Synchronisation could enable
a base station controller or another network unit to establish
35 during operation the time slot(s) in which interference actually
occurs, making use of knowledge of relative offsets of TDMA time
slot numbers between base stations. With this feature larger IUO
cells could be used, permitting more efficient use of bandwidth,
at least in some circumstances.

40 In a synchronised network, because each mobile station needs less

WO 99/57826

PCT/EP99/02995

26

5 time to make timing measurements more time is available for other
functions. One possibility is for a mobile station to make extra
measurements to instead improve traffic control and handover
decisions. This could take advantage of a system that used
randomly distributed frame numbers or even better a system in
10 which frame number offsets were carefully planned to a scheme
which to some extent optimised the time offsets between
synchronisation bursts of adjacent base stations to the
measurement schedule of mobile stations. This latter system will
be described in more detail hereinafter.

15 The measurement units associated with base stations as described
hereinbefore could be used to detect potential faults in the
system and to report such potential faults to the network
operator. Examples of such potential faults include detection
20 of neighbouring base stations that cease to transmit (especially
ones that are intended by their base station controller to be in
operation) or ones whose synchronisation drifts or is excessively
inaccurate. Furthermore, the measurement units could report on
received signal level and accuracy from neighbouring base
25 stations to give the network additional information on network
interference and/or loss of coverage.

Since minor errors in base station timing can be corrected by the
system described above, in such a system less accurate and hence
30 less expensive base station clocks could be used.

A synchronised system as described above may make it easier to
meet the FCC911 requirement for determining the locations of
mobile stations. FCC911 is a US requirement that the location of
35 a mobile station be known within a given accuracy for emergency
purposes. Two locating methods are proposed: the TOA (time of
arrival) method, which makes use of the times at which signals
from mobile stations are received, and the OTD (observed time
difference) method, which makes use of observed differences in
40 the reception of signals for example from a mobile station at a
plurality of base stations. These methods generally demands

WO 99/57826

PCT/EP99/02995

27

5 knowledge of the real-time differences (RTDs) between neighbouring base stations to a relatively high level of accuracy, which could be achieved relatively easily in a synchronised network.

10 In the preceding embodiment, time slot alignment is achieved. An alternative embodiment will now be described in which not only is time slot alignment used but also the TDMA frame numbers of base stations are also synchronised, preferably for small groups of base stations.

15 Since frame numbering is hierarchical, with the most important cycles being the basic TDMA cycle, the multi frame cycle, and the hyper frame cycle, there are several available levels of frame number synchronisation. However, fully synchronised frame numbers are not necessarily desirable, since this would imply simultaneous transmission of frequency and synchronisation bursts of all base stations, which would reduce the time available to mobile stations for pre-synchronising to and measuring reception levels of neighbouring base stations, and which in turn would lead to poorer handover performance. This will be discussed hereinafter in more detail. In general, different features made possible by time slot alignment require different levels of frame number synchronisation. Therefore, the optimal choice for frame number synchronisation depends on the relative importance of the feature in question.

30 To achieve frame number synchronisation a base station could send relative frame numbers, i.e. the differences between frame numbers of adjacent base stations and its own corresponding frame number to the base station controller. The base station controller's knowledge of relative frame numbers as in a GSM system should normally be sufficient for most aspects of time-slot alignment. If some level of frame number synchronisation is to be provided then it may be required that the base station controller be able to command base stations to change their frame counter. This could suitably happen when a base station starts

WO 99/57826

PCT/EP99/02995

28

5 up, e.g. before it starts transmitting on the BCCH.

10 Time frame synchronisation means changing each base station's independent and unique time frame numbering regimes by an integer multiple of burst periods. This method involves determining the differences in frame number between different base station frame number regimes over the air interface. The base station controller then commands each base station to adjust its frame number regimes over the air interface by a certain relative value. This is thus a differential technique which provides a
15 solution independent of the variable and unknown transmission delays across the Base Station Systems BSS and radio propagation delay.

20 In current GSM systems the start of the transmission of TDMA frames, i.e. the beginning of the first time slot TS 0, by the base stations is not co-ordinated between the base stations. Each base station independently selects the frame number (FN) of the first frame it transmits at random. Time slot alignment as described hereinbefore does not change this. Accordingly the
25 relative time slots and frame numbers between base stations remain arbitrary as illustrated in Figure 8 which shows the slots and frames 60 transmitted by one base station and the slots and frames 62 transmitted by another base station. The time slots may be aligned but the frame numbers are not nor are the beginning
30 of each of the frames.

The base station controller is not aware of the frame numbers and time slot for any base station at a certain time since the base station controller and base stations do not share a common time
35 reference. This is because the Abis (interface between the base station and the base station controller) transmission network causes unknown and variable delays.

40 However, if the base station controller knows about the relative time slots and frame numbers for each base station, improvements can be achieved. The current GSM systems allocate frequencies on

WO 99/57826

PCT/EP99/02995

29

5 a transceiver basis. Channel allocation on a time slot basis provides 8 times the granularity and reduces interference. For example, if time slot number 3 of a base station 1 is concurrent in time with time slot number 5 of base station 2 which use the same frequency as time slot number 3 of base station 1, then the
10 base station controller can avoid allocating time slot number 5 of base station number 2 if time slot number 3 of base station 1 is already allocated. This interference management feature requires the base station controller's knowledge of relative time slots (and relative frame numbers for SDCCHs (the Stand-alone
15 Dedicated Control Channel)) between base stations.

IUO is currently based upon a worst case interference scenario and capacity is planned on a transceiver basis. The base station controller is able to work out in which time slot the
20 interference actually occurs. This makes possible larger IUO cells and thus more efficient use of bandwidth. This again requires the base station controller's knowledge of relative time slots and frame numbers between base stations.

25 To achieve a significant capacity improvement the mere knowledge of relative time slots and frame numbers may not be sufficient. Instead, it may require the synchronisation of TDMA frames and their frame numbers between base stations as illustrated in Figure 9.

30 The advantage of frame number synchronisation is that tighter frequency reuse can be achieved. With frequency hopping, there is no interference between two channels using the same set of hopping frequencies and the same hopping sequence number HSN but
35 different mobile allocation offsets MAIO. Co-channel interference within a cell is therefore avoided by using the same hopping sequence number but different mobile allocation index offsets for all hopping transceivers within a cell. The same hopping frequencies can be reused in adjacent cells using a different
40 hopping sequence number, but at the cost of a statistical average for co-channel interference being proportional to $1/N$ where N is

WO 99/57826

PCT/EP99/02995

30

5 the number of hopping frequencies. Thus the same hopping sequence number should be used for as many transceivers in a cell as possible.

10 Since for any hopping set with N frequencies, there is the same number N of different mobile allocation index offsets, co-channel interference is minimised if N transceivers use the same hopping sequence number. With usually less than N hopping transceivers in a cell the set of possible mobile allocation index offsets cannot be exhausted within a single cell and it is desirable to use the same hopping sequence number in more than one cell (also known as frequency sharing) to better match the number of hopping frequencies with the number of transceivers using the same hopping sequence number.

20 However, having the same hopping sequence number but different mobile allocation index offset is not sufficient to provide non colliding hopping sequences in different cells since each frequency of any hopping sequence depends also on the frame number of the corresponding TDMA frame. In particular, the non collision depends on the superframe number part of for the frame number which is the time parameter in modulo 64. Thus synchronisation of frame numbers is required for frequency sharing. Without frame number synchronisation between two cells, there will be interference between two channels of these two cells even if they are assigned the same hopping sequence number. The pseudo random nature of the frequency hopping sequences makes it difficult to accommodate different TDMA frame numbers by a specific choice of frequency hopping parameters to make frequency sharing useful without frame synchronisation.

35 With multi sectored sites this restriction is not a problem since all transceivers at one site are or easily fully synchronised and the frame numbers are all the same for all time slots concurrent in all cells. This increases the useful length N of hopping sequences as compared to single site base stations. For example
40 for a three sector site with three hopping transceivers for each

WO 99/57826

PCT/EP99/02995

31

5 sector, a set of nine hopping frequencies is optimal since then
each hopping transceiver can be allocated a different mobile
allocation index offset and all nine possible mobile allocation
index offsets are exhausted. In a non synchronised network with
10 all base stations transmitting in their own time domain, co
channel interference between adjacent cells occurs when the same
frequency hopping sets are used. In contrast in a frame number
synchronised network, all base stations will start their burst
transmissions simultaneously. One advantage of frame number
15 synchronisation is that the same frequency hopping set and the
same hopping sequence number can be used in more than one cell
without co channel interference. This means that tighter
frequency reuse can be achieved with, for example traffic only
frequencies.

20 In summary, with frequency hopping, there is no interference
between two channels using the same set of frequencies and the
same hopping sequence number but different mobile allocation
indices. Therefore it is desirable to use the same hopping
sequence in different base stations. But since hopping sequences
25 are determined mainly by the frame number sequence, this is only
possible if frame numbers are synchronised. For a frequency
hopping network, the frequency hopping sequences may be
determined by the frame number. Frame number synchronisation of
many base stations may degrade handover performance which is
30 caused by the way mobile stations detect adjacent cells.
Accordingly, in preferred embodiments of the invention, frame
number synchronisation is used only for small groups of base
stations.

35 This embodiment of the invention can use the same components as
described hereinbefore to provide time slot alignment. The
relative misalignments of burst transmissions of different base
stations are measured by the GEMU elements.

40 Time slot and frame number detection therefore makes use of and
relies upon time slot alignment. In other words, the time slots

WO 99/57826

PCT/EP99/02995

32

5 are aligned before frame number detection takes place since the
frame number detection only make sense when time slots are
aligned. The detection of time slots and frame numbers is done
over the air interface. The necessary radio measurements are done
by the GEMU elements, required for time slot alignment, and
10 reported to the base station controller. Since the features in
question depend only on the base station controller's knowledge
of the difference in time slot and frame number between the base
stations and not on the absolute time slot and frame number
values of any base station, no common absolute time reference
15 between base stations or between base station controller and base
stations is required. It is sufficient if time slot and frame
number detection takes place shortly after the base station has
started up. The differences in time slot and frame number to any
neighbour base station remain constant making frame number
20 detection very robust.

The GEMU pre-synchronises to neighbouring base stations as part
of the time slot alignment process. This includes receiving
synchronising channel bursts which contain the frame number and
25 are always sent in the first time slot, TS0. The GEMU also
determines the time when it receives those Synchronising channel
bursts within the time reference of its host or reference base
station, i.e. the frame number, the time slot, and the time slot
misalignment. For the purpose of time slot alignment, the GEMU
30 reports the observed time slot misalignment values to the base
station controller. Now, for the purpose of frame number
synchronisation, the GEMU also reports the differences in time
slot and frame numbers between the neighbouring base stations and
the host base station.

35 The observed time differences between base stations change as the
network tries to reduce the real time differences, i.e. the time
difference between simultaneous transmissions, to zero. After a
few iterations of this feedback process, however, the differences
40 in time slot and frame number do not change anymore and
subsequent changes concern only the time slot misalignment. The

WO 99/57826

PCT/EP99/02995

33

5 base station controller determines when this stable state is reached by verifying that time slot misalignment values are below a certain threshold.

10 The base station controller can now make use of the knowledge of relative time slots and relative frame numbers in order to implement network enhancement features such as those mentioned hereinbefore. The GEMU elements may also be used for mobile station location. Ongoing maintenance of time slot alignment means that time slot and frame number differences between the
15 base stations remain constant. This holds even if a base station temporarily falls out of the time slot alignment process, since the later correction of a misalignment due to drift can always be performed in a way such that time slot and frame number differences are preserved. Hence, some GEMU reporting capacity
20 may be saved by transmitting time slot and frame number differences less frequently than time slot misalignments.

25 Frame number synchronisation is possible for base stations which are time slot aligned and for which time slot and frame number detection is available, but is preferably applied only to small groups of base stations since large-scale frame number synchronisation may not be desirable. Frame number synchronisation is done shortly after the base station has started up. No periodic feedback process is necessary to maintain
30 frame number synchronisation. Random relative frame numbers are preserved between frame number synchronised groups.

35 The base station controller knows from the radio network plan about groups of those base stations which should have their frame numbers synchronised with each other. The base station controller makes sure that all base stations in each such group do not become immediately accessible for mobile stations after start-up. These base stations may choose a random frame number at start-up as usual and must start to transmit on common channels on the
40 BCCH frequency, but the cell must be marked as 'barred'. For the first base station of each synchronisation group which enters

WO 99/57826

PCT/EP99/02995

34

5 this state, the base station controller can immediately remove
the 'cell-barred' status. This base station will serve as a
"master" (that is the host or reference) to the other "slave"
base stations of the same group. For each slave base station, the
base station controller waits until its transmissions are
10 "roughly" time slot aligned with the corresponding master base
station. It is not necessary to wait until "precise" alignment,
i.e. with the specified accuracy of 5 μ s, since the relative time
slots and frame numbers will not change after the first few
iterations of the time slot alignment process.

15 Optionally, the base station controller might speed up time slot
alignment by treating this slave base station with higher
priority in the ongoing time slot alignment process. The base
station controller calculates the difference in time slot and
20 frame number between the slave and master base station. The base
station controller sends a command to the base station to changes
its time slot and its frame number by the calculated differences,
such that the differences in time slot and frame number will be
reduced to zero. The slave base station changes its radio
25 transmissions accordingly and instantly by changing appropriate
time counters in its software. The base station controller clears
the 'cell-barred' condition. The slave base station is now fully
operational and frame number synchronised with its master.
Possibly remaining small discrepancies in time slot alignment
30 will be removed by the time slot alignment process without losing
the frame number synchronisation. Frame number synchronisation
could also be done when the base station is already in use,
although there seems to be no need to do so. The base station
controller would first have to hand over all current traffic to
35 other base stations and then 'bar' the cell as is also required
for base station maintenance which might require shutting down
a base station.

40 An alternative method of synchronizing the frame number involves
transmitting an absolute frame number value across variable
transmission delay elements with an accuracy to at least half a

WO 99/57826

PCT/EP99/02995

35

5 burst period (289 μ s). Furthermore, the method requires that the base station controller is able to interrogate each base station for its frame number and obtain it with an accuracy of half a burst period. Guaranteeing such high time resolution between network elements requires appropriate signalling.

10

In a network incorporating base station time slot alignment, new methods to reduce interference may be implemented and thus enable an increase in capacity. But in order to implement these techniques, the base station controller must manage the time slot separation and frame number separation of simultaneous transmissions of different base stations.

15

If the frame numbers are aligned over an area covered by a large number of cells, the mobile stations may require longer to pre-synchronise to adjacent cells and the maintaining of the pre-synchronising may be harder. Pre-synchronisation speeds up handovers and helps to identify the cells which dominate the frequencies on which the mobile stations measure the received field strengths. These field strength measurements are used to make handover decisions and for auto base station system features. Full frame synchronisation may be disadvantageous.

25

The mobile station has to receive and analyse the frequency correction and synchronisation channel bursts transmitted by each base station in a dedicated mode for pre-synchronising to adjacent cells. Subsequent maintenance of this pre-synchronisation requires that the mobile station continue to receive the synchronisation channel bursts. These steps can only take place in the search frame which occurs every 26 TDMA frames in GSM, that is every 120ms, due to the stringent timing constraints which a mobile station has to follow in the GSM standard.

30

35

In a fully frame number synchronised network, each frequency correction and synchronisation channel burst is transmitted by all base stations simultaneously which has a detrimental effect

40

WO 99/57826

PCT/EP99/02995

36

5 on the probability that the mobile station will locate these
bursts in the search frame. As a result of the timing scheme of
the synchronisation channel bursts the mobile station may only
be able to receive the synchronising channel burst every 9.4
10 search frames which is about once a second. Without frame
synchronisation, synchronising channel bursts of different base
stations can be assumed to be equally distributed over time and
the mobile station can use all of its of its search frames for
the reception of synchronising channel bursts which may give a
15 receive capacity of one synchronising channel burst every 120 ms.
This means that the synchronisation of frame numbers can lead to
a reduction in the capacity for receiving the synchronising
channel bursts of a factor of about 9.4. For the mobile stations
which are able to process more than one synchronising channel
burst per search frame, the degradation in relative capacity may
20 be higher.

With initial pre-synchronisation, the situation is more
complicated since the mobile station does not know in advance in
which search frame it will be able to receive a frequency
25 correction channel burst on a given BCCH frequency. The mobile
station therefore has to start its search at a random point of
time and on average the mobile station will for five search
frames before it is able to receive a given frequency correction
channel burst on a given BCCH frequency for the first time. This
30 is regardless of whether there is any frame number
synchronisation. Two frames later it can receive the
synchronising channel burst to complete pre-synchronisation.
However after handover, the list of adjacent base stations
usually has more than one change so the mobile station will
35 sometimes initiate a second pre-synchronisation process
immediately after the one that has just been completed. If there
is no frame synchronisation, it will take around five search
frames on average to receive the frequency correction channel
burst and with frame synchronisation it takes on average 7.4
40 search frames to receive the frequency correction channel burst.
This means that frame number synchronisation reduces performance

WO 99/57826

PCT/EP99/02995

37

5 by 50 percent. In practice, mobile stations will not receive every frequency correction and synchronisation channel burst due to bad reception conditions. With frame number synchronisation, the mobile station will take 9.4 search frames until it is next able to receive the missed burst and no use can be made of the
10 intervening search frames. Without frame number synchronisation, those intermediate search frames can be used by the mobile station to listen to other mobile stations.

15 In summary, preferred embodiments of the invention do not have frame number synchronisation over an entire network as discussed hereinbefore. The number of base stations which are frame number synchronised to one another will depend on the network requirements as well of course the access method used. However
20 some embodiments of the present invention may be synchronised over the entire network.

An alternative to the frame synchronisation described hereinbefore will now be described. In particular, two types of partial frame number synchronisation will now be described. A
25 first form of partial frame number synchronisation will be described with reference to Figure 10. In this embodiment, frame numbers are synchronised within a small group of base stations. This group is much smaller than in the method discussed hereinbefore. Typically, each group will have two or three base
30 stations. Figure 10 shows two of these small groups 70 and 72. The network would be made up of these small groups. As only two or three base stations are synchronised in each group, advantages can be achieved particularly in frequency hopping environments. With three frequency hopping transceivers at three sectorised cell
35 sites, eighteen hopping frequencies can be effectively shared among two base stations. With those groups which have three coverage areas served by one base station, more than two base stations can be included in each group but this might lead to problems. If each base station serves only one coverage area,
40 then each group may consist of three or four base stations.

WO 99/57826

PCT/EP99/02995

38

- 5 A second alternative to the frame number synchronisation is shown in Figure 11. In this alternative, the frames with the same frame number are not fully synchronised. Rather, there is partial synchronisation of the frames. In other words, the frames with the same frame number are desynchronised by a few time slots.
- 10 This means that the Frequency correction channel and the synchronising channel bursts of the adjacent base stations do not coincide. In this way the number of time slots where the frame number is synchronised in neighbouring cells is reduced. For example, two neighbouring sites whose frames are out of
- 15 synchronisation by two time slots will share the same frame number in six out of eight time slots. Frequency sharing is most useful on the six shared time slots and this will be taken into account when allocating channels.
- 20 Although the frequency correction channel and synchronising channel bursts of neighbouring cells do not collide in this alternative, there is a high probability that these bursts will fall within the same search frame of a mobile station. Therefore only those mobile stations which after having found a frequency
- 25 correction channel burst in a certain search frame start to search for a frequency correction channel burst of another neighbouring base station in the same search frame will not have frame synchronisation.
- 30 This method is particularly applicable to one dimensional chains of cells, such as two sectorised directional cell sites arranged, for example, along a street.

35 Frame number synchronisation may permit a tighter frequency reuse pattern which could increase capacity.

The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof irrespective of whether it relates to the

40 presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art

WO 99/57826

PCT/EP99/02995

39

- 5 that various modifications may be made within the scope of the invention.

WO 99/57826

PCT/EP99/02995

40

5 CLAIMS

1. A telecommunications system comprising:

a first transmitter unit for transmitting first signals to at least one station;

10 a second transmitter unit for transmitting second signals to at least one station;

a receiving unit associated with the first transmitter unit for receiving the second signals; and

15 a synchronisation unit coupled to the receiving unit for generating a control signal to at least one of the first and second transmitters to increase the synchronisation of the first and second signals.

2. A telecommunications system as claimed in claim 1, wherein
20 the receiving unit is arranged to determine the difference between the timing of the first transmitter unit and the second transmitter unit.

3. A telecommunications system as claimed in claim 2, wherein
25 the receiving unit is arranged to calculate an average difference between the timing of the first transmitter unit and the second transmitter unit.

4. A telecommunications system as claimed in claim 1 or 2,
30 wherein the receiving unit is arranged to transmit the difference to said synchronisation unit.

5. A telecommunications system as claimed in preceding claim,
wherein the first and second transmitter units are arranged to
35 be synchronised to within 5 μ s.

6. A telecommunications system wherein said synchronisation
unit is arranged to synchronise said first and second
40 transmitters to a reference clock.

WO 99/57826

PCT/EP99/02995

41

5 7. A telecommunications system as claimed in claim 6, wherein said reference clock is supplied by said synchronisation unit.

8. A telecommunications system as claimed in claim 6, wherein said reference clock is a clock signal of one of said first and
10 second transmitter units.

9. A telecommunications system as claimed in claim 6, wherein said reference clock is the average of clock signals of said first and second transmitter units.

15 10. A telecommunications system as claimed in any one of the preceding claims, wherein the synchronisation unit is arranged to generate said control signal if the timing of said first and second transmitters differ by at least a predetermined amount.

20 11. A telecommunications system as claimed in any of the preceding claims, wherein said second transmitter unit also has a receiving unit associated therewith for receiving said first signals, said receiving unit also being coupled to said
25 synchronisation unit.

12. A telecommunication system as claimed in claim 11, wherein the synchronisation unit is arranged to average the difference in the timing of the first and second transmitter units provided
30 by the receiving units associated with the first and second transmitter units respectively.

13. A telecommunications system as claimed in claim 10 or 11, wherein said system comprises a third transmitter unit and a
35 further receiving unit associated therewith, wherein each of the three receiving units determines the difference of the timing signals between the transmitter unit with which the receiving unit is associated and each of the other two transmitter units.

40 14. A telecommunications system as claimed in claim 13, wherein said synchronisation unit is arranged to determine the minimum

WO 99/57826

PCT/EP99/02995

42

5 timing difference between two transmitter units based on a
comparison of the timing difference observed by the receiver unit
associated with one of the two transmitter units between said
transmitter units and the sum of: the difference observed by the
receiver unit associated with said one transmitter unit between
10 said one transmitter unit and the third transmitter unit; and the
difference observed by the receiver unit associated with the
third transmitter unit between the third transmitter unit and the
other of the two transmitter units.

15 15. A telecommunications system as claimed in any preceding
claim, when appended to claim 2, wherein said synchronizing unit
is arranged to adjust difference in timing determined by said
receiving unit to take into account the relative positions of
said transmitter units.

20 16. A telecommunications system as claimed in any one of said
preceding claims, wherein the or at least one of the receiving
units is incorporated in the transmitter unit with which the
receiving unit is associated.

25 17. A telecommunications system as claimed in any one of the
preceding claims, wherein the first and second transmitter units
use a time division multiple access method where time is divided
into a plurality of slots and said first and second transmitter
30 units transmit signals to different stations in different time
slots, said synchronisation unit being arranged to synchronise
substantially the beginning of time slots of the first and second
transmitter units.

35 18. A telecommunications system as claimed in claim 17, wherein
the frequency of the first and said second transmitter units
changes between time slots.

40 19. A telecommunications system as claimed in claim 17 or 18,
wherein n time slots are arranged in a frame and each frame has
an associated number.

WO 99/57826

PCT/EP99/02995

43

5 20. A telecommunications system as claimed in claim 19, wherein frames having the same frame numbers of said first and second signals are synchronised.

10 21. A telecommunications system as claimed in claim 19, wherein the frames having the same frame numbers of said first and second signals overlap in time but the beginning of said frames do not coincide.

15 22. A telecommunications system as claimed in any one of the preceding claims, comprising a multiplicity of transmitter units, said multiplicity of transmitter units being divided into a plurality of groups, each group comprising a plurality of transmitter units which are substantially synchronised with the other of the transmitter units in said group and the plurality
20 of groups are not synchronised with respect to each other.

25 23. A telecommunications system as claimed in claim 22, wherein each group comprises three or four transmitter units, each transmitter unit serving a single coverage area.

24. A telecommunications system as claimed in claim 22, wherein each group comprises two transmitter units, each transmitter unit serving a plurality of coverage areas.

30 25. A telecommunications system as claimed in any one of the preceding claims, wherein said system is a wireless cellular telecommunications network.

35 26. A telecommunications network as claimed in claim 25, wherein the wireless cellular network is in accordance with the GSM standard.

40 27. A telecommunications system as claimed in claim 25 or 26, wherein at least one of said transmitter units is a base transceiver station.

WO 99/57826

PCT/EP99/02995

44

5 28. A telecommunication network as claimed in any one of claim
25 to 27 wherein the synchronisation unit is incorporated in a
base station controller.

10 29. A telecommunications system as claimed in any preceding
claim, wherein said synchronization unit is arranged to build a
matrix wherein each element of said matrix represents the timing
difference between two transmitter units.

15 30. A method for synchronising a telecommunications system
comprising:

transmitting first signals to at least one mobile station
from a first transmitter unit;

transmitting second signals to at least one mobile station
from a second transmitter unit;

20 receiving the second signals at said first transmitter unit;
and

comparing the timing the first signals with the timing of
the second signals as received by at the first transmitter unit
and generating a control signal to at least one of the first and
25 second transmitter units to increase the synchronisation of the
first and second signals.

31. A telecommunications system comprising:

30 a first transmitter unit for transmitting first signals to
at least one station when said at least one station is in a first
area covered by said first transmitter unit;

a second transmitter unit for transmitting second signals
to at least one station when said at least one station is in a
second area covered by said second transmitter unit; and

35 a timing difference determining unit for determining the
difference in timing of said first and second transmitter units
and for providing information on said difference to at least one
station, said information being used by said station when said
station moves between said first and second areas.

40

32. A station for use in a telecommunications network

WO 99/57826

PCT/EP99/02995

45

5 comprising:

a transmitter unit for transmitting first signals to at least one terminal;

10 a receiving unit for receiving second signals from a second transmitter unit which is arranged to transmit second signals to at least one terminal, said receiving unit arranged to determine a difference in the timing between said first and second transmitter units; and

15 a timing control unit for controlling the timing of said first signals, said control unit being controllable to reduce the difference in timing between said first and second transmitter units.

33. A telecommunications system comprising:

20 a first transmitter unit for transmitting first signals to at least one station;

a second transmitter unit for transmitting second signals to at least one station;

a receiving unit for comparing the time of said first and second signals; and

25 a synchronisation unit coupled to the receiving unit for generating a control signal to at least one of the first and second transmitters to increase the synchronisation of the first and second signals.

WO 99/57826

PCT/EP99/02995

1/4

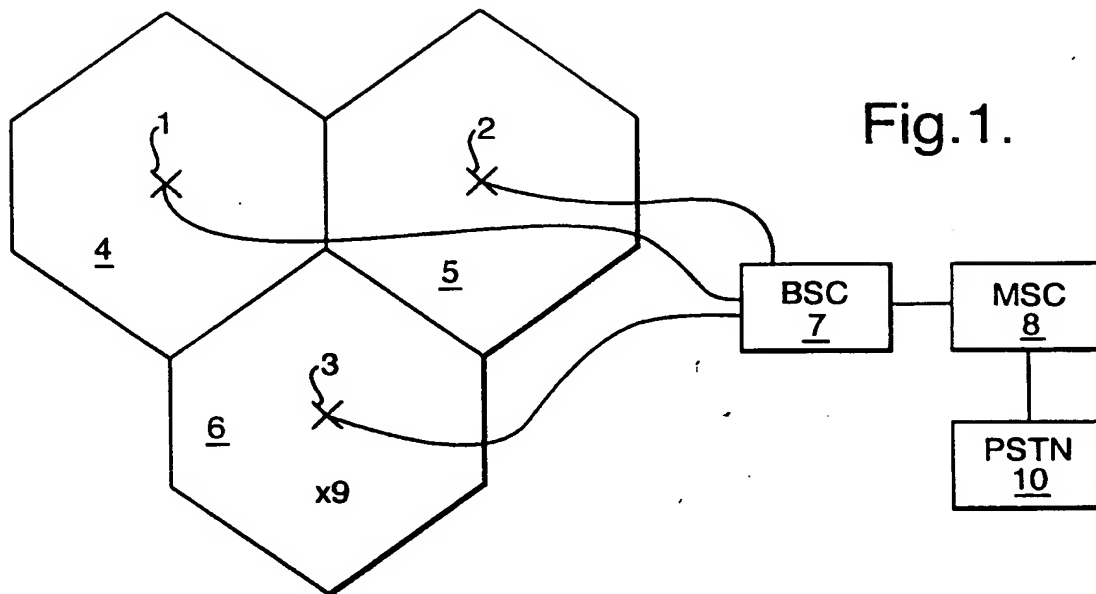


Fig.2.


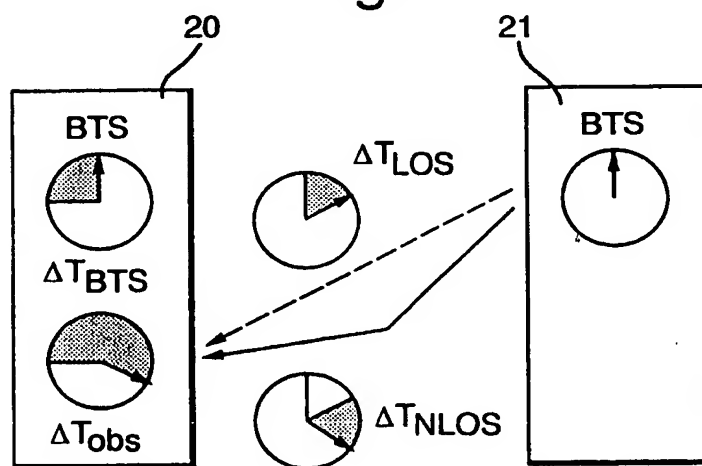


Fig.3.

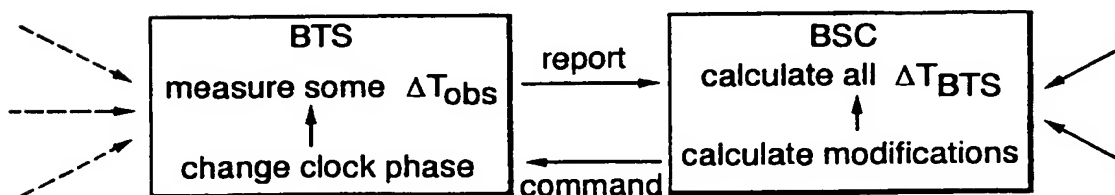

WO 99/57826

PCT/EP99/02995

2/4
Fig.4.

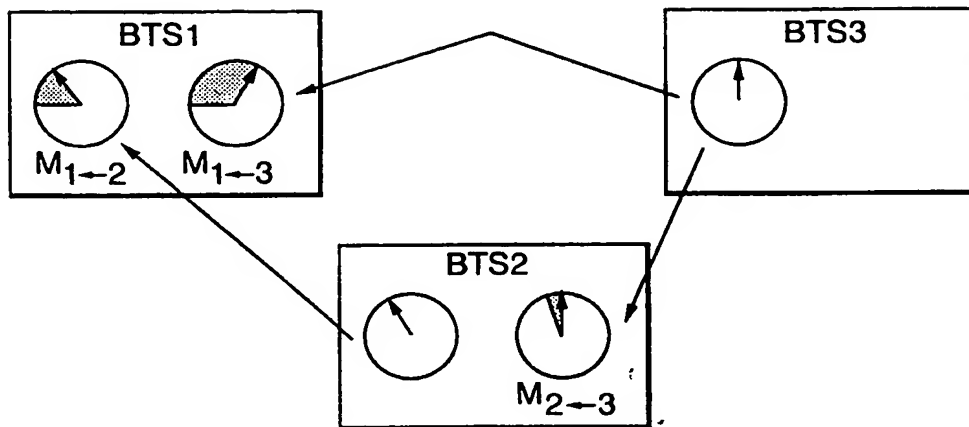


Fig.5.


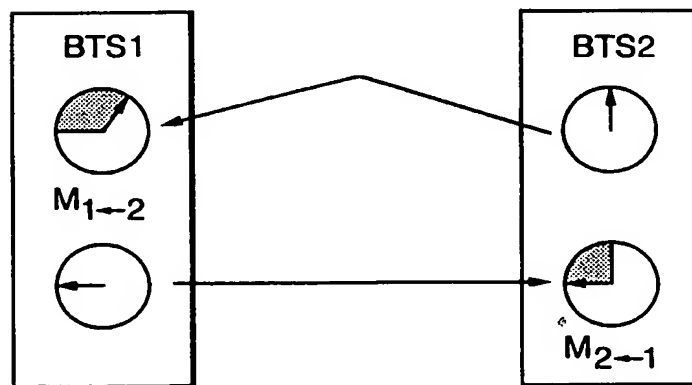


Fig.6.

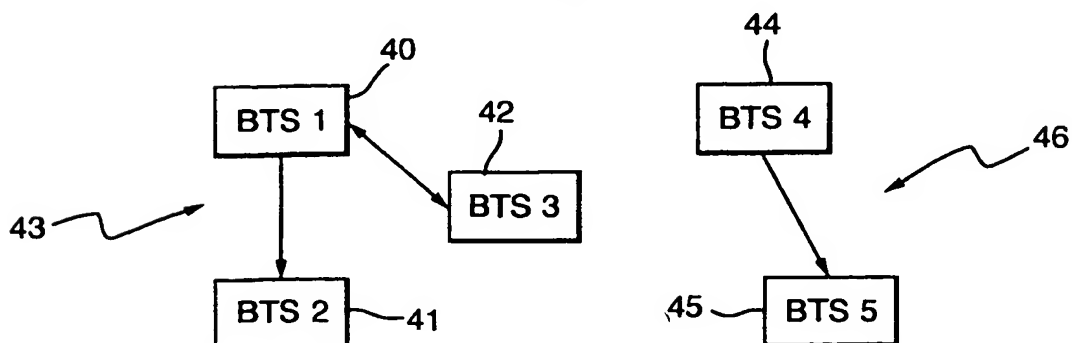

WO 99/57826

PCT/EP99/02995

3/4

Fig.7.


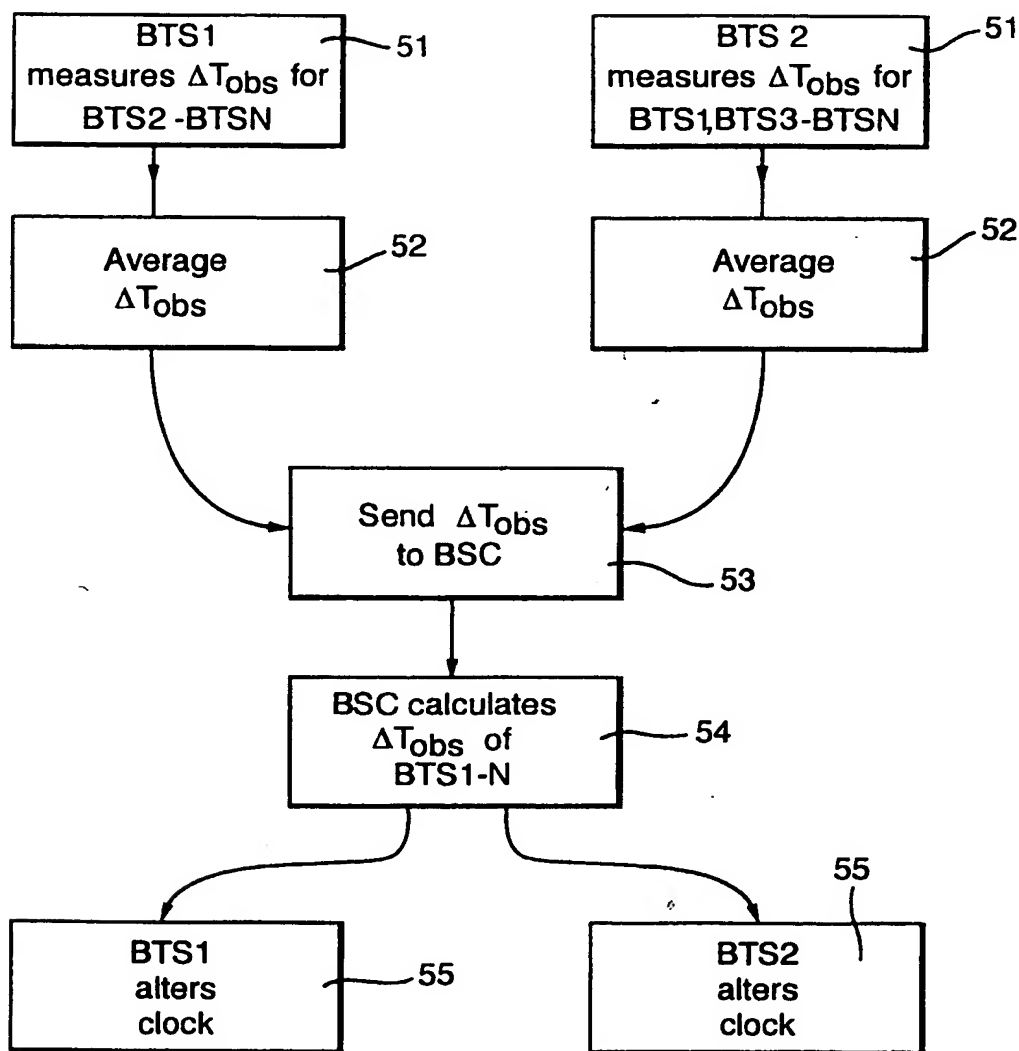


Fig.8.

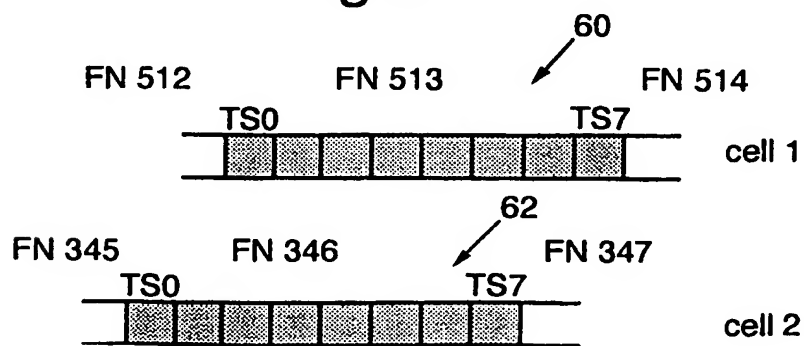

SUBSTITUTE SHEET (RULE 26)

WO 99/57826

PCT/EP99/02995

4/4

Fig.9.

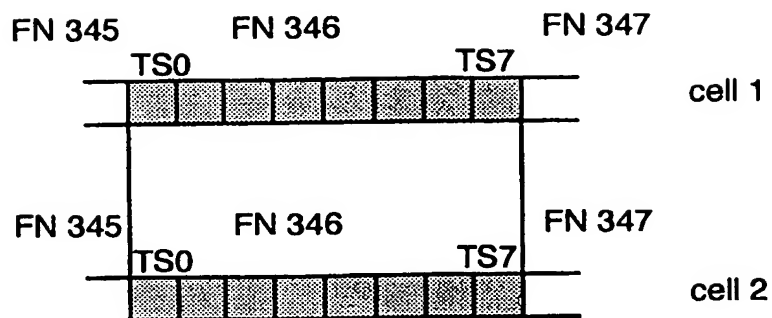


Fig.10.


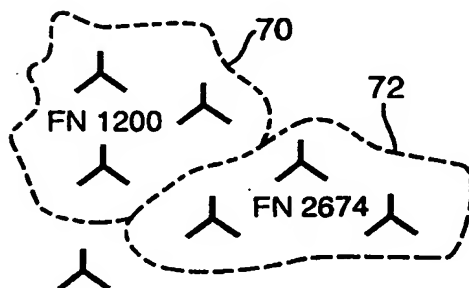


Fig.11.

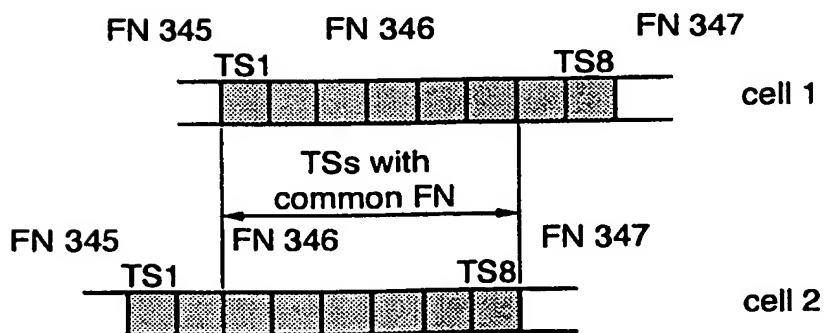

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/02995

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 H04J3/06 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04J H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JUSTIN C -I CHUANG: "AUTONOMOUS TIME SYNCHRONIZATION AMONG RADIO PORTS IN WIRELESS PERSONAL COMMUNICATIONS" IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY, vol. 43, no. 1, 1 February 1994 (1994-02-01), pages 27-32, XP000450943 ISSN: 0018-9545 abstract	1-8, 10-27, 29-33
A	page 28, column 1, line 45 - page 30, column 2, line 11 --- -/--	9,28



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

*** Special categories of cited documents :**

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 August 1999

Date of mailing of the international search report

26/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Chauvet, C

INTERNATIONAL SEARCH REPORT

Int ernational Application No

PCT/EP 99/02995

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	YOSHIHIKO AKAIWA ET AL: "AUTONOMOUS DECENTRALIZED INTER-BASE-STATION SYNCHRONIZATION FOR TDMA MICROCELLULAR SYSTEMS" 1991 IEEE 41TH. VEHICULAR TECHNOLOGY CONFERENCE, ST. LOUIS, MAY 19 - 22, 1991, no. CONF. 41, 19 May 1991 (1991-05-19), pages 257-262, XP000260188 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS ISBN: 0-87942-582-2 abstract	1-8, 10-27, 29-33
A	part II	9,28
A	----- ARIYAVISITAKUL S ET AL: "NETWORK SYNCHRONISATION OF RADIO PORTS IN WIRELESS PERSONAL COMMUNICATIONS" ELECTRONICS LETTERS, vol. 28, no. 25, 3 December 1992 (1992-12-03), pages 2312-2314, XP000332623 ISSN: 0013-5194 abstract page 2312, column 2, line 11 - page 2313, column 1, line 6 page 2313, column 1, line 36 - column 2, line 26	1-33
A	----- US 5 519 759 A (HEINECK FRANK ET AL) 21 May 1996 (1996-05-21) abstract column 5, line 64 - column 9, line 10 -----	1-33

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/02995

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5519759 A	21-05-1996	DE 4317895 A	01-12-1994
		AT 175836 T	15-01-1999
		DE 59407619 D	25-02-1999
		EP 0626796 A	30-11-1994
		ES 2128454 T	16-05-1999
